


10/35 WPF FIELD RESULTS

CHRIS BROWNE, June 2019

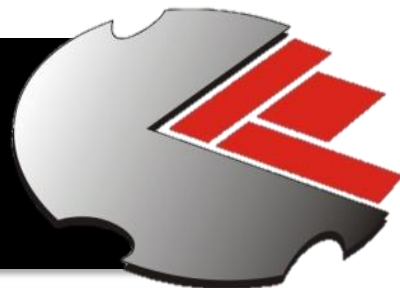

COUNTRY	New Zealand
SAWMILL	Peterson Winch Production Frame
MOTOR	35hp Vanguard
BLADE SIZE	10" (25cm)
UPGRADES	Electric Winch for vertical sizing
TIMBER	Redwood
BEAM DIMENSIONS	Mostly 8" x 1" (20cm x 2.5cm)
LOG LENGTH	7m (24")
TOTAL BOARD FEET CUT	13,560bft (32m3)
TOTAL HOURS WORKED	16hrs milling, 6 days spent on-site
AVERAGE PRODUCTION PER DAY	5.33m3
TOTAL INCOME	NZ\$6,500
SAWMILL RUNNING COSTS	68litres (15 gallons) of fuel + NZ\$80 for blade re-tip
BLADE REPLACEMENT	None
BLADE SHARPENING	10 mins, 3 times per day while blade still on mill
BOARD FEET CUT WITH BLADE	26,288bft (62m3) and then re-tipped

REQUEST A QUOTE TODAY!

sales@petersonsawmills.com – Phone: +64 7 348 0863 – www.petersonsawmills.com